

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number  
**WO 03/031746 A2**

(51) International Patent Classification<sup>7</sup>: E04C

(21) International Application Number: PCT/US02/32638

(22) International Filing Date: 11 October 2002 (11.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/328,628 11 October 2001 (11.10.2001) US

(71) Applicant (for all designated States except US):  
**COLLINS & AIKMAN AUTOMOTIVE COMPANY INC.** [US/US]; 350 Stephenson Highway, Troy, MI 48083 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RIHA, Keith, A.** [US/US]; 4205 Oak Tree Circle, Rochester, MI 48306 (US). **NEWPORT, Colin** [CA/CA]; 20 Colonial Drive, Avr, Ontario, Ontario NOB1E0 (CA). **WEISSERT, Ulrich** [US/US]; 3707 Briarbrook Lane, Rochester, MI 48306 (US).

(74) Agents: **GROSSMAN, Steven, J. et al.**; Grossman, Tucker, Perreault & Pfleger, PLLC, 55 South Commercial Street, Manchester, NH 03101 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTEGRATED STEEL CROSS-CAR BEAM

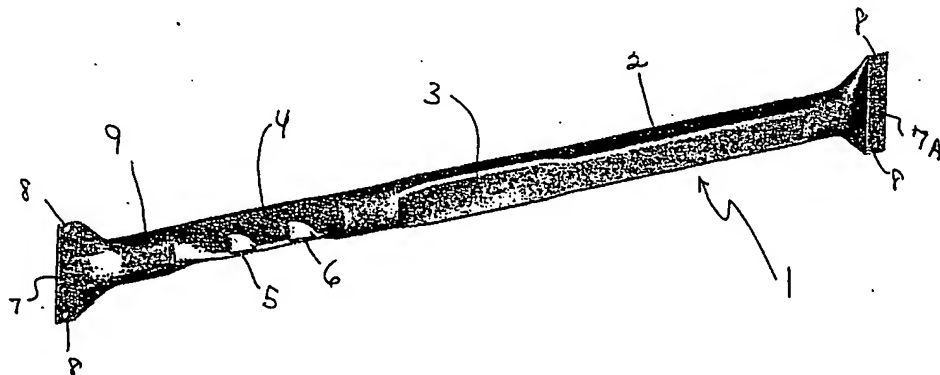

(57) Abstract: A metal cross-car beam for support of components in a vehicle comprises a hollow metal tube of unitary construction including end sections, said tube formed to accommodate direct attachment of vehicle components at various points to said tube, wherein said end sections are formed into flanges which attach directly to a vehicle body.

WO 03/031746 A2

## INTEGRATED STEEL CROSS-CAR BEAM

This invention relates to a metal cross-car beam used in the cockpit of a vehicle to support the instrument panel, steering column, pedals, air bag canister and related compartments and to manage energy in vehicle impact events. More particularly, the metal beam is constructed of a steel or aluminum tube with a closed cross-section having formed ends for attachment to the car body, eliminating bracketry and reducing cost. The ends of the beam may be formed by stretching and flattening the tubing wall thus providing a larger attachment surface resulting in better load distribution and increased stiffness and stability.

### Background of the Invention

Cross-car beams which support instrument panel components and absorb energy in vehicle impact events are generally complex assemblies made up of three general sections, 1) driver's side (with steering column bracket), 2) passenger side with air bag canister support and 3) center console (often supporting an HVAC unit). In addition, while this beam can be provided in one or more sections, connections to the A pillars (or front side pillars) require the use of brackets since the closed shape of the beam is required for stiffness while the ends need to be of a flat shape for attachment. A number of references address such bracketry.

In U.S. Patent 5,238,286 to Mazda, a support beam 1 having a hollow internal reinforcing pipe 11 is disclosed. It is attached at the pillar areas by brackets 12.

U.S. Patent 5,934,733, to GM discloses an extruded cross-car beam that uses end caps 3, 4 to attach to the A pillars.

U.S. Patent 5,230,530 to Mazda discloses a generally round steering support member 26 connected to the hinge pillars by brackets 27.

U.S. Patent 5,868,426 to Chrysler discloses a cross beam mounted in a vehicle body between cowls on opposite sides of the vehicle to support a steering column. Brackets 32, 33 are used to affix the beam 30 to the cowls.

5        There are numerous other references in the art of composite beams formed to provide structural stiffness and to support vehicle components which have end features readily attachable to the vehicle pillar areas. However, what is needed is a single piece cross-car support made of metal that has end features integrally formed which are readily and directly attachable to vehicle pillar areas.

10

### Summary of the Invention

A metal cross-car beam for support of components in a vehicle comprises a hollow metal tube including end sections, said tube formed to accommodate direct  
15       attachment of vehicle components at various points to said tube, wherein said end sections are formed into flanges which attach directly to a vehicle body.

### Brief Description of the Drawings

These and other objects, features and advantages of the invention will become  
20       apparent upon consideration of the description of this invention and the appended drawing in which:

**FIG. 1** shows a perspective view of the cross-car beam of the invention.

### Description of the Preferred Embodiment

25

A metal cross-car beam for structural support of components and energy management in the cockpit of a vehicle is preferably produced from a steel tube of generally square, closed cross-section shape which is formed to accommodate both component attachment and attachment to the vehicle. Preferably through the process of  
30       hydro-forming, the driver's side end of the tube can be expanded and tailored in shape to

improve the section properties of the beam and to provide a mounting surface for the steering column. Since the cross-sectional shape is preferably square on the passenger's side of the beam, the air bag canister can be readily attached directly to it. Finally, and preferably through a pinching operation, the ends of the square tube are expanded, then  
5 flattened to accommodate bolts to attach the beam directly to the A-pillar and cowl areas of the vehicle. Each end of the flattened tube may have a different thickness, if desired, to add structural integrity for attachment or to reduce weight. This beam construction eliminates the need for additional attachment bracketry, resulting in a single piece beam that minimizes assembly labor.

10

**FIG 1** shows a preferred 3.5 inch by 3.5 inch hollow steel tube formed into a cross-car beam 1 having features formed for the attachment of components as well as features formed for attachment of the beam to the vehicle body. In the context of the present invention, tube cross-section can vary between 1.0 inch by 1.0 inch to 7.0 inch by  
15 7.0 inch, in increments of 0.001 inches, and the shape can vary, but is not limited to, e.g. square, rectangular, round, hexagonal, trapezoidal, etc.

To produce the cross-car beam of the present invention, it is preferred to use a hydroforming process and a steel, steel alloy, aluminum or aluminum alloy relatively  
20 thin-wall hollow tube. The process may preferably comprise a set of dies or molds having cavities in the configuration of the final shape of the cross-car beam. These dies are generally held in a conventional single action hydraulic press having high ram force. The metal tube is rolled or formed, and welded into a regular shape that is placed into the dies. After the dies are closed, fluid pressure is applied, generally in stages to the inside  
25 of the tube to expand the tube to conform to the configuration of the cavities of the dies. The beams thus formed have many advantages over welded sheet metal parts including reduced manufacturing costs by decreasing part count, and improved performance by reducing mass and increasing stiffness.

The generally square hollow tube is formed to receive an airbag canister directly attached on the passenger side 2 eliminating the need for additional bracketing. In the center 3 of the beam 1, the cross-section is flattened somewhat to accommodate brackets attached to the instrument panel and to attach to the glove box and center stack areas for stability and support. In the steering column area 4 on the driver's side of the cross-car beam, a large triangular 5.25 inch section is formed as one surface for direct attachment of the steering column to the beam 1. Attachment features to accept the steering column assembly are shown at 5, 6. Likewise, the pedal system for the vehicle may be directly mounted to the beam 1 in this same area. It is also preferred to form the beam 1 by stretching or compressing the cross-section of the hollow tube to allow for a thicker gage on the driver's side end 7 (preferably about 2.5 mm) for higher structural integrity while allowing for a lower gage (preferably 1.5 mm) on the passenger's side end 7A to save weight. Of particular note is the round cross-section formed at 9 on the driver's side end of the beam to provide additional strength for support of the steering column and pedal arrangement. The ends of the tube 7, 7A are formed by expanding the diameter of the tube, preferably by as much as 50%, then pinching the ends together to create a flat attachment flange. Holes 8 in this flange allow direct attachment of the beam 1 to the vehicle body in the A pillar area without additional brackets being required. The length of the tube extends from 7 to 7A in Fig. 1.

20

Thus, it can be seen that the invention provides a new and improved single piece metal cross-car beam which can be formed into various shapes along its length to accommodate attachment of components and to support numerous vehicle components. Further this single unitary piece cross-car beam may have attachment flanges formed integrally for direct attachment to the vehicle body, eliminating numerous attachment brackets and saving cost, weight and assembly labor.

The description and drawings illustratively set forth the presently preferred invention embodiments. The description and drawings are intended to describe these embodiments and not to limit the scope of the invention. Those skilled in the art will

appreciate that still other modifications and variations of the present invention are possible in light of the above teaching while remaining within the scope of the following claims. Therefore, within the scope of the claims, one may practice the invention otherwise than as the description and drawings specifically shown and described.

5

10

15

We claim:

5           1.     A metal cross-car beam of unitary construction for support of components  
in a vehicle comprising:

          a hollow metal tube including end sections, said tube formed to accommodate  
direct attachment of vehicle components at various points to said tube, wherein  
said end sections are formed into flanges.

10

          2.     The metal cross-car beam of claim 1, wherein said hollow tube contains a  
length and a cross-sectional shape which varies along said length.

15

          3.     The hollow metal tube in claim 1, having a thickness wherein the  
thickness of said hollow metal tube varies along said length of said beam.

          4.     The cross-car beam of claim 1, wherein the hollow metal tube is steel or  
alloys thereof.

20

          5.     The cross-car beam of claim 1, wherein the hollow metal tube is  
aluminum or alloys thereof.

25

          6.     The cross-car beam of claim 1, wherein said tube is formed by  
hydroforming.

          7.     The cross-car beam of claim 2, wherein said tube cross-sectional shape is  
varied by stretching or compressing the tube.

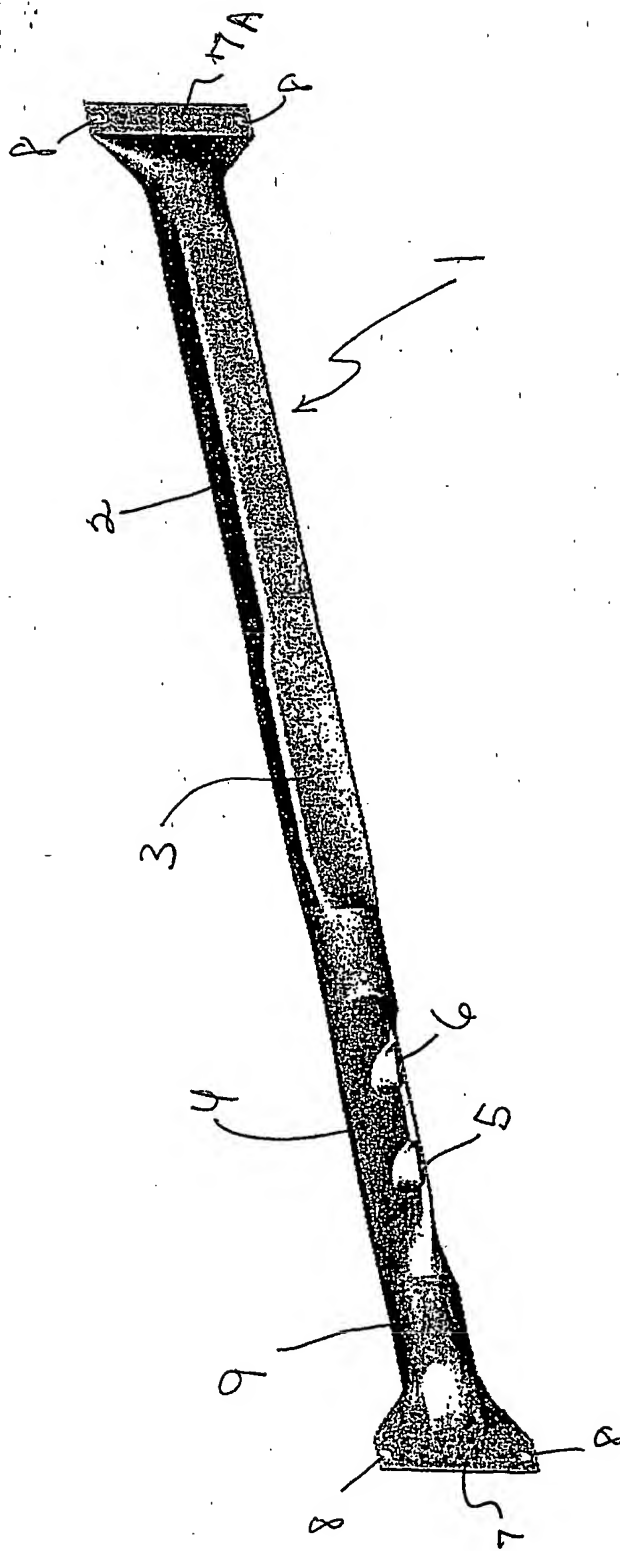


FIGURE 1



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number  
**WO 03/031746 A3**

(51) International Patent Classification<sup>7</sup>: E04C 3/30

(21) International Application Number: PCT/US02/32638

(22) International Filing Date: 11 October 2002 (11.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/328,628 11 October 2001 (11.10.2001) US

(71) Applicant (for all designated States except US):  
COLLINS & AIKMAN AUTOMOTIVE COMPANY  
INC. [US/US]; 350 Stephenson Highway, Troy, MI 48083  
(US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): RIHA, Keith, A.  
[US/US]; 4205 Oak Tree Circle, Rochester, MI 48306  
(US). NEWPORT, Colin [CA/CA]; 20 Colonial Drive,  
Avr, Ontario, Ontario NOB1E0 (CA). WEISSERT, Ulrich  
[US/US]; 3707 Briarbrook Lane, Rochester, MI 48306  
(US).

(74) Agents: GROSSMAN, Steven, J. et al.; Grossman,  
Tucker, Perreault & Pfleger, PLLC, 55 South Commercial  
Street, Manchester, NH 03101 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:  
16 October 2003

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INTEGRATED STEEL CROSS-CAR BEAM

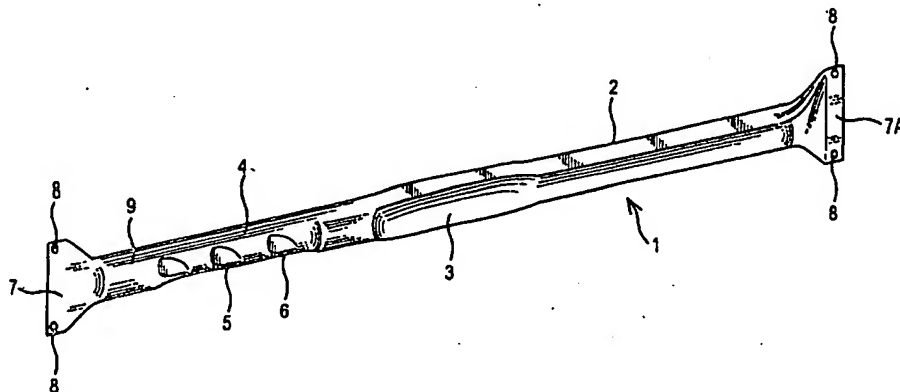

(57) Abstract: A metal cross-car beam (10) for support of components in a vehicle comprises a hollow metal tube of unitary construction including end sections (7, 7A). The tube is formed to accommodate direct attachment of the vehicle components at various points to said tube, wherein the end sections (7, 7A) are formed into flanges directly attached to the vehicle body.

WO 03/031746 A3

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/32638

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) E04C 3/30  
US CL 52/731.6

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 52/731.6

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
NONE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y          | US 6,145,271 A (KOSSMEIER et al) 14 November 2000, See entire document.            | 1-7                   |
| Y          | US 2,728,587 A (MCKINLEY) 27 December 1995, See entire document.                   | 1-7                   |
| Y, P       | US 6,419,302 B2 (MIKUNI) 16 July 2002, See entire document.                        | 1-7                   |

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "Z" document member of the same patent family

Date of the actual completion of the international search

27 March 2003 (27.03.2003)

Date of mailing of the international search report

23 MAY 2003

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Carl Friedman

Telephone No. 703-308-1113